



Industrial solutions

Open Spring Mountings

Type OSB, OSS & OS25



This unique range of Open Spring mountings uses integral rubber end fixing of the springs which sets them apart from all other designs. Larger capacity open spring mountings use rubber grommets and base pads to ensure no direct metal path between the machine and the seating, thus enhancing high frequency noise isolation.

Originally designed for use with Type IPF Inertia Pouring Frames, the OS mountings are now widely used to isolate vibration from every conceivable type of rotating and reciprocating machine. Where control of transient motion is required Open Spring mountings can be used in conjunction with our Viscous

[®]Dampers Type SFD.



MADE IN
BRITAIN

Excellence in Anti Vibration Technology Since 1914

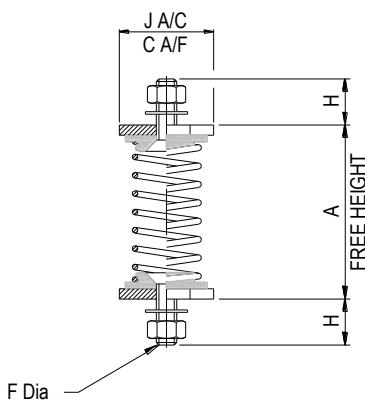
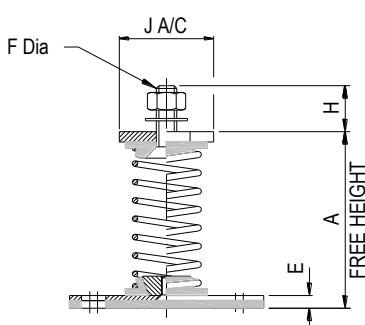
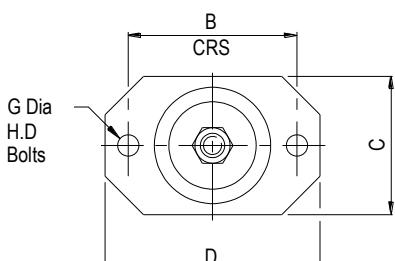
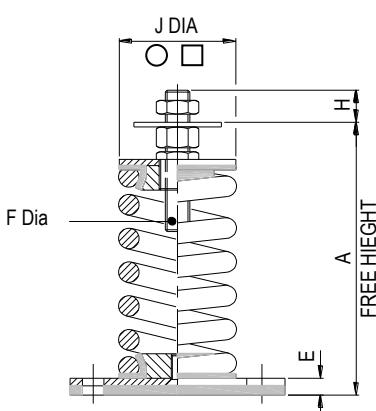
www.christiegrey.com

Design Features

- Unique expanding rubber end fixing of springs which also provides high frequency attenuation.
- Nominal 20 & 25mm deflection colour coded helical steel springs to BS1726 Class B with 50% overload capacity and O/D equal to at least 85% of working height.
- Can be bolted to supporting structure or free standing on 6 mm thick ribbed rubber pad (3 mm on OSS).
- Fully height adjustable (OS25).
- All steel components are zinc plated.
- No snubbing gives maximum efficiency.

Typical Applications

- Axial and Centrifugal Fans
- Air Handling Units
- Low Level Pipework.
- With Inertia Bases type IPF for Pumps, Generating Sets and Compressors etc.

OSB20/10 – OSB15/100

OSS20/10 – OSS15/100

OS25/30 – OS25/2300


PART No.	COLOUR CODE	RATED LOAD (kg)	DEFLECTION AT RATED LOAD (mm)	DIMENSIONS (mm)								MAX WT (kg)
				A	B	C	D	E	F	G	H	
OSB20/10	PURPLE	10	20									
OSB20/15	YELLOW	15	20	68	-	32	-	-	M8	-	16	37
OSB20/20	GREY	20	20									
OSB20/40	GREEN	40	20									
OSB20/70	RED	70	20									
OSB15/100	BLUE	100	15									
OSS20/10	PURPLE	10	20									
OSS20/15	YELLOW	15	20	69	57	38	76	5	M8	M6	16	37
OSS20/20	GREY	20	20									
OSS20/40	GREEN	40	20									
OSS20/70	RED	70	20									
OSS15/100	BLUE	100	15									
OS25/30	YELLOW	30	25									
OS25/60	GREEN	60	30									
OS25/100	BLUE	100	25	115	87	70	110	10	M10	M8	20	57
OS25/160	WHITE	160	25									
OS25/250	RED	250	25									
OS25/200	PURPLE	200	25									
OS25/300	GREY	300	25									
OS25/400	ORANGE	400	25									
OS25/500	BROWN	500	25									
OS25/600	ORANGE/BLACK*	600	25	152	110	90	140	11	M16	M12	24	76
OS25/700	BLACK	700	25									
OS25/800	BLUE	800	25									
OS25/1000	BLUE/BLACK*	1000	25									
OS25/1200		1200	25									
OS25/650	YELLOW	650	26									
OS25/850	GREEN	850	27	176	165	130	200	18	M20	M16	42	130
OS25/1050	BLUE	1050	26									
OS25/1250	WHITE	1250	26									
OS25/1300	RED	1300	27									
OS25/1600	PURPLE	1600	25	225	210	150	250	18	M24	M16	52	150
OS25/2000	GREY	2000	26									
OS25/2300	BROWN	2300	29									

*Internal nested spring.

The top of the mounting is either Hexagonal or Round See Dimension J for information.

Spring Deflection

Spring stiffness is linear over its working range therefore the actual deflection for a given load can be calculated as follows:-

$$\text{Actual Deflection (mm)} = \frac{\text{Actual Load (kg)} \times \text{Rated Deflection (mm)}}{\text{Rated Load (kg)}}$$

ISOLATION EFFICIENCY AT TYPICAL MACHINE SPEEDS

MACHINE SPEEDS (rpm)	EFFICIENCY %	
	15 mm DEFL.	25 mm DEFL.
300	DO NOT USE	34.0
500	68.7	83.3
750	88.1	93.2
1000	93.7	96.3
1200	95.7	97.4
1500	97.3	98.4
1750	98.0	98.8
2000	98.5	99.1

The above figures are theoretical values only based on the vertical natural frequency of the sprung system assuming infinitely stiff structural supports.

The effects of high frequency spring coil resonances on low frequency performance are also ignored.

For full instructions please refer to our data sheet DS027.

For more detailed information and technical assistance please contact our Technical Department.

In the interests of continual development, the Company reserve the right to make modifications to these details without notice.



Christie & Grey Ltd
Morley Road,
Tonbridge, Kent
TN9 1RA, England

T: +44 (0)1732 371100
E: sales@christiegrey.com
W: www.christiegrey.com

